



# 关于卧龙

1984


30

卧龙集团

# 产品介绍


|                    |      |      |      |     |
|--------------------|------|------|------|-----|
| 1Ph 230VAC 50/60Hz |      |      |      |     |
| 0.15kW-0.3kW       |      |      |      |     |
| ≥ 0.6              |      |      |      |     |
| -25                | 60   |      |      | -40 |
| -30~40             |      |      |      |     |
| 0-10V RS485        |      |      |      |     |
| B3                 | B30  | B14  |      |     |
| IP20               | IP44 | IP55 | IP66 |     |
| C3-H               | C4-H |      |      |     |
| UL                 |      | CE   |      | CCC |

|              |     | [V]       |    | [Hz]          |  | [kW] | [r/min]                |     |     |          |       | [A] | [%] |     |
|--------------|-----|-----------|----|---------------|--|------|------------------------|-----|-----|----------|-------|-----|-----|-----|
| EM4210A15*** |     | 1~220-240 |    | 50/60         |  | 0.15 | 720/960/1000/1050/1200 |     |     | 200~1200 |       | 1.4 | 80% |     |
| EM4210A13*** |     | 1~220-240 |    | 50/60         |  | 0.25 | 720/960/1000/1050/1200 |     |     | 200~1200 |       | 2.1 | 81% |     |
| EM4210A12*** |     | 1~220-240 |    | 50/60         |  | 0.37 | 960/1000/1050/1200     |     |     | 200~1200 |       | 2.8 | 82% |     |
| EM4210B15*** |     | 1~220-240 |    | 50/60         |  | 0.15 | 1350/1500/1800/2200    |     |     | 200~2200 |       | 1.5 | 81% |     |
| EM4210B13*** |     | 1~220-240 |    | 50/60         |  | 0.25 | 1350/1500/1800/2200    |     |     | 200~2200 |       | 2.2 | 82% |     |
| EM4210B12*** |     | 1~220-240 |    | 50/60         |  | 0.3  | 1350/1500/1800/2200    |     |     | 200~2200 |       | 3   | 83% |     |
|              |     |           |    |               |  |      |                        |     |     |          |       |     |     |     |
|              | A   | B         | C  | D             |  | E    | H                      | K   | L   | AB       | AC    | BB  | EB  | HD  |
| 42           | 112 | 90        | 45 | 12.7/15/17/20 |  | /    | 71                     | 8.5 | 244 | 135      | 102.5 | 110 | /   | 135 |

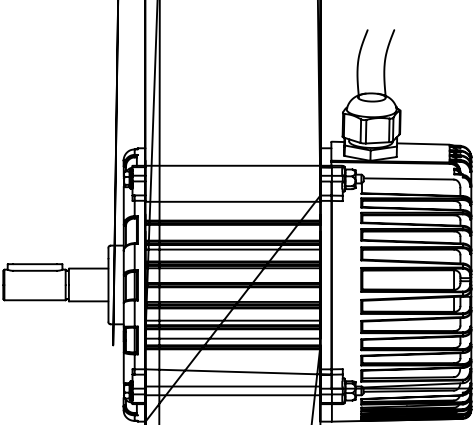

|                        |       |     |  |     |
|------------------------|-------|-----|--|-----|
| 3Ph 380~480VAC 50/60Hz |       |     |  |     |
| 1.1                    | 2.2kW |     |  |     |
| ≥ 0.9                  |       |     |  |     |
| -25                    | ~55   |     |  | -40 |
| -30~40                 |       |     |  |     |
| 0-10V RS485            |       |     |  |     |
| B3                     | B30   | B14 |  |     |
| IP55                   | IP66  |     |  |     |
| C3-H                   | C4-H  |     |  |     |
| UL                     |       | CE  |  |     |

|              | [V]        | [Hz]  | [kW] | [r/min]                |   |          | [A] | [%] |     |       |     |    |     |
|--------------|------------|-------|------|------------------------|---|----------|-----|-----|-----|-------|-----|----|-----|
| EM5610A32*** | 3~380-480V | 50/60 | 1.1  | 720/960/1000/1050/1200 |   | 200~1200 | 2.4 | 86% |     |       |     |    |     |
| EM5610A21*** | 3~380-480V | 50/60 | 1.5  | 720/960/1000/1050/1200 |   | 200~1200 | 3.2 | 87% |     |       |     |    |     |
| EM5610A31*** | 3~380-480V | 50/60 | 2.2  | 960/1000/1050/1200     |   | 200~1200 | 4.5 | 88% |     |       |     |    |     |
| EM5610B32*** | 3~380-480V | 50/60 | 1.1  | 1350/1500/1800/2200    |   | 200~2200 | 2.4 | 88% |     |       |     |    |     |
| EM5610B21*** | 3~380-480V | 50/60 | 1.5  | 1350/1500/1800/2200    |   | 200~2200 | 3.2 | 89% |     |       |     |    |     |
| EM5610B31*** | 3~380-480V | 50/60 | 2.2  | 1350/1500/1800/2200    |   | 200~2200 | 4.5 | 90% |     |       |     |    |     |
|              |            |       |      |                        |   |          |     |     |     |       |     |    |     |
|              | A          | B     | C    | D                      | E | H        | K   | L   | AB  | AC    | BB  | EB | HD  |
| 56           | 140        | 100   | /    | 20/24                  | / | 90/100   | 11  | /   | 180 | 138.5 | 130 | /  | 141 |





3P  
3  
-30~40



