

()

AEM

Wolong Enapter(ZheJiang)
Hydrogen Energy Technolo-
gy Co., Ltd.



AEM



()

Company Profile

()

()

(.SH)

EnapterAG

(H FRA)

,

EnapterAG

AEM

EnapterAG

“

”

AEM

目录

AEM

EL .

WT .

DRY .



AEM

AEM WEH-Flex-

WEH-Nexus-



制氢产品

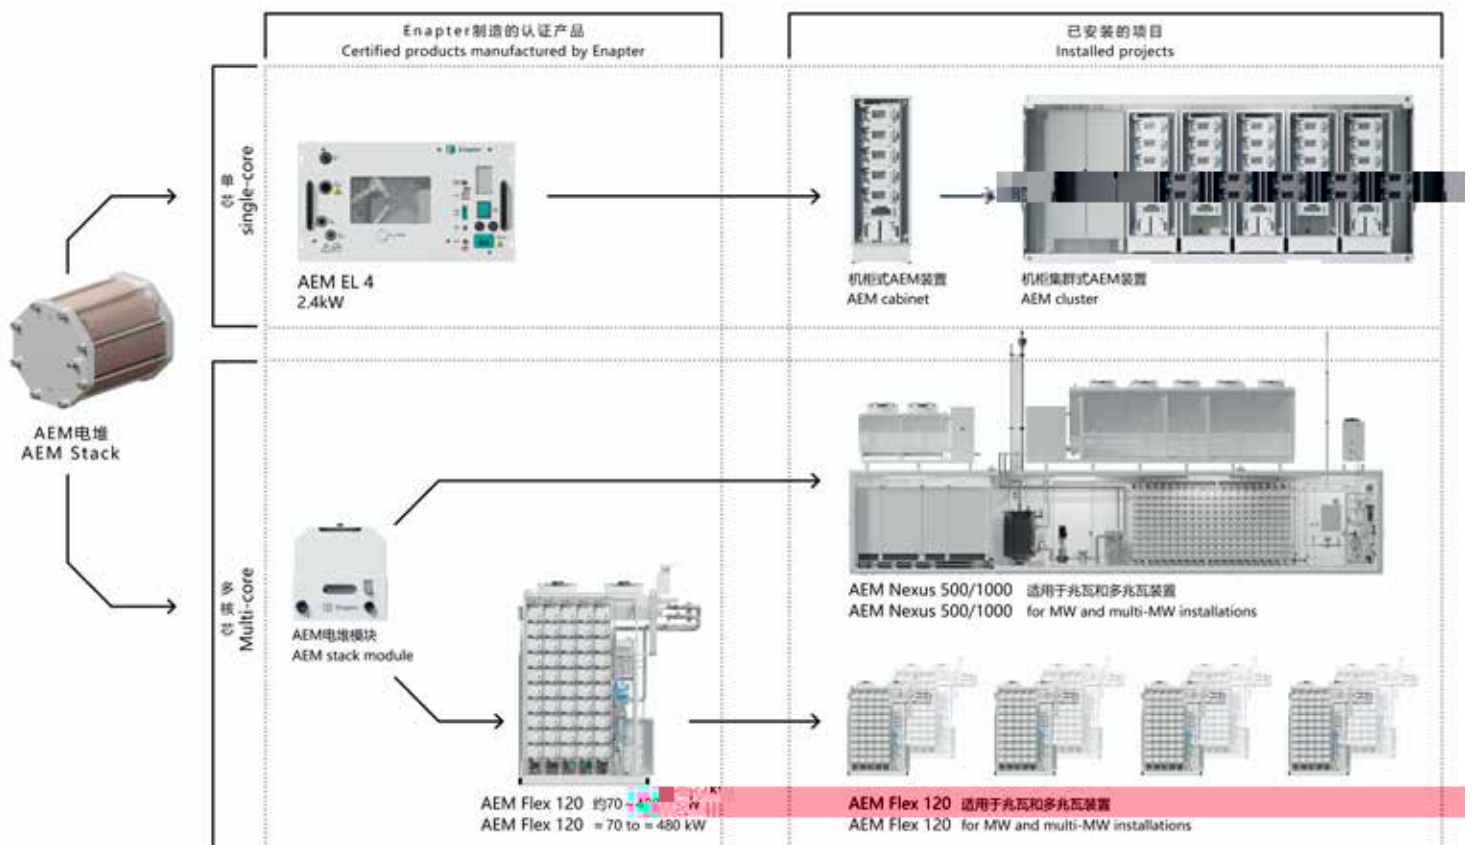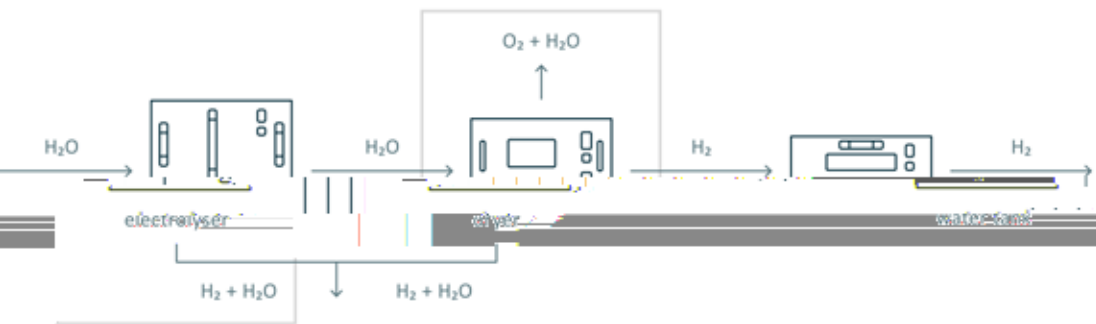

大功率 AEM 制氢装置

WEH	Flex		AC	A	D	S	
	AEM	: Nm /h	AC: V DC:	A: - W: -	D:dryer	S: C: H:	:CE :UL :

WEH	Nexus		AC	A	D	S	
	AEM	: Nm /h : Nm /h	AC: V DC:	A: - W: -	D:dryer	S: C: H:	:CE :UL :

机柜式 AEM 制氢装置 --- 新

WEH	EL	.	AC	A	D	T	S
	AEM	. : Nm /h . : Nm /h . : Nm /h . : Nm /h . : Nm /h	AC: V DC:	A: - W: -	D:dryer :	T:Tank :	S: C:

WEH-EL-0.5



Enapter

(AEM)

技术规格


Technical Specifications

—пун-YY—

—cop-YY—

技术规格

Technical Specifications

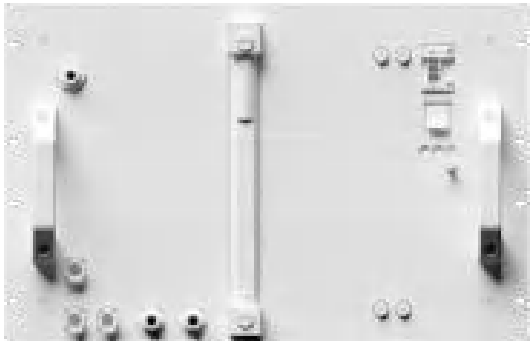

IP

. L

. barg

W

W

AC - V, / Hz

°C- °C

- %Rh

IP

Enapter

< μS/cm(at °C)

- barg

. L/min

> . L/min

kg

kg

W: mm × D: mm × H: mm

U

AEM

技术规格

Technical Specifications



_____ pφp YY _____

_____ . Nm³/hr
_____, ppm
> ____ %
<- °C, ISO (< ppm < ppm)
_____ bar
_____ W
_____ W
AC - V, / Hz
_____ - °C
* * = mm × mm × mm (U)
_____ kg

Enapter



=

AEM

=

. Nm³/h~ . Nm³/h

=


	WEH-EL- . -AC-ADTS	WEH-EL- . -AC-ADTS	WEH-EL- . -AC-ADTS	WEH-EL- . -AC-ADTS	WEH-EL- . -AC-ADTS
	. Nm ³ /h	Nm ³ /h	. Nm ³ /h	Nm ³ /h	. Nm ³ /h
	. kW	. kW	. kW	. kW	kW
mm	× ×	× ×	× ×	× ×	× ×
	kg	kg	kg	kg	kg
	barg				
	– V (AC), / Hz				
	-				
	%Rh				
IP	IP				

	WEH-EL- . -AC-WDTS	WEH-EL- . -AC-WDTS	WEH-EL- . -AC-WDTS	WEH-EL- . -AC-WDTS	WEH-EL- . -AC-WDTS
	. Nm ³ /h	Nm ³ /h	. Nm ³ /h	Nm ³ /h	. Nm ³ /h
	. kW	. kW	. kW	. kW	kW
mm	× ×	× ×	× ×	× ×	× ×
	kg	kg	kg	kg	kg
	barg				
	°C – °C				
	– barg				
	– V (AC), / Hz				
	-				
	%Rh				
IP	IP				

	WEH-EL- . -DC-ADTS	WEH-EL- . -DC-ADTS	WEH-EL- . -DC-ADTS	WEH-EL- . -DC-ADTS	WEH-EL- . -DC-ADTS
	. Nm³/h	Nm³/h	. Nm³/h	Nm³/h	. Nm³/h
	. kW	. kW	. kW	. kW	kW
mm	x x	x x	x x	x x	x x
	kg	kg	kg	kg	kg
	barg				
	DC - V				
	-				
	%Rh				
IP	IP				


	WEH-EL- . -DC-ADTS	WEH-EL- . -DC-ADTS	WEH-EL- . -DC-ADTS	WEH-EL- . -DC-ADTS	WEH-EL- . -DC-ADTS
	. Nm³/h	Nm³/h	. Nm³/h	Nm³/h	. Nm³/h
	. kW	. kW	. kW	. kW	kW
mm	x x	x x	x x	x x	x x
	kg	kg	kg	kg	kg
	barg				
	°C – °C				
	– barg				
	DC - V				
	-				
	%Rh				
IP	IP				

WEH-Flex-25

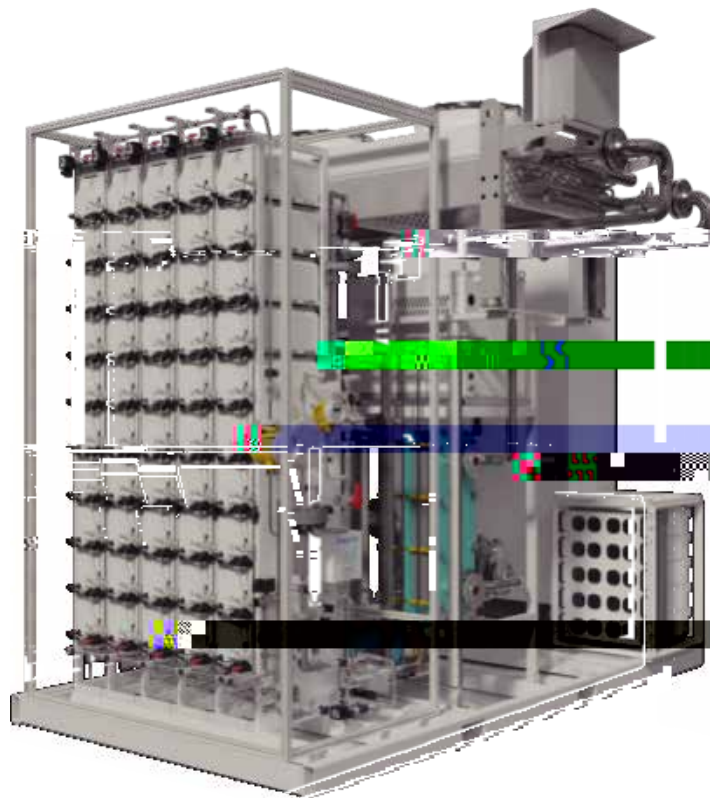

Enapter EMS
(skid mounted)


H2	Nm³/h . kg/ h	
H2	barg	
H2	. % , - °C	
H2	. % , - °C	:H2O < ppm, O2 < ppm ≈ kW
H2	- °C	
O2	. Nm³/h	
	kW(BOL), kW(EOL)	(BOL), (EOL)
	× VAC	%
	/ Hz	± %; THD< %
H2O	L/h	
H2O		
H2O	- °C	- barg
	%- %	H2
	:	/
	. kWh/Nm³H₂	WEH-Nexus- (BOL)
	- %	
	- %	
	- %	
	kw	
		- °C
	kW	BOL;= °C
	. x . x	(x x)
	≈ .	

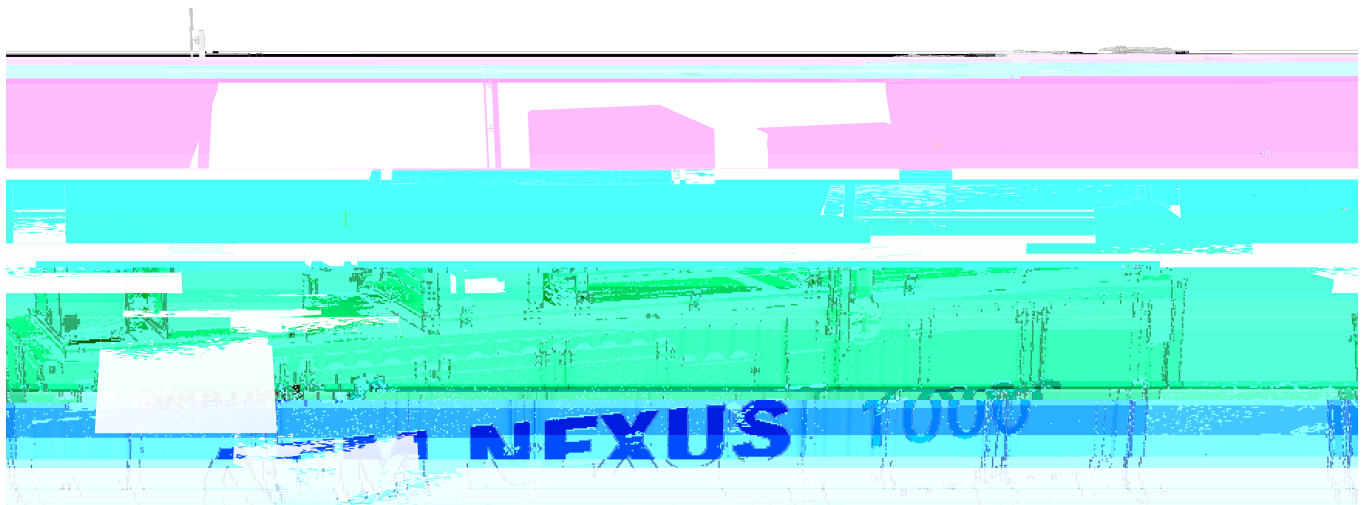

This technical drawing illustrates the side view of a machine layout. It shows a long, low-profile base structure with several internal compartments. On top of this base, there are various components: a large rectangular unit on the left, a central assembly with multiple cylindrical tanks or containers, and two tall, narrow vertical structures on the right. The drawing uses perspective to show the depth of the machine. The entire setup is positioned on a dark, solid ground plane.

[illegible]



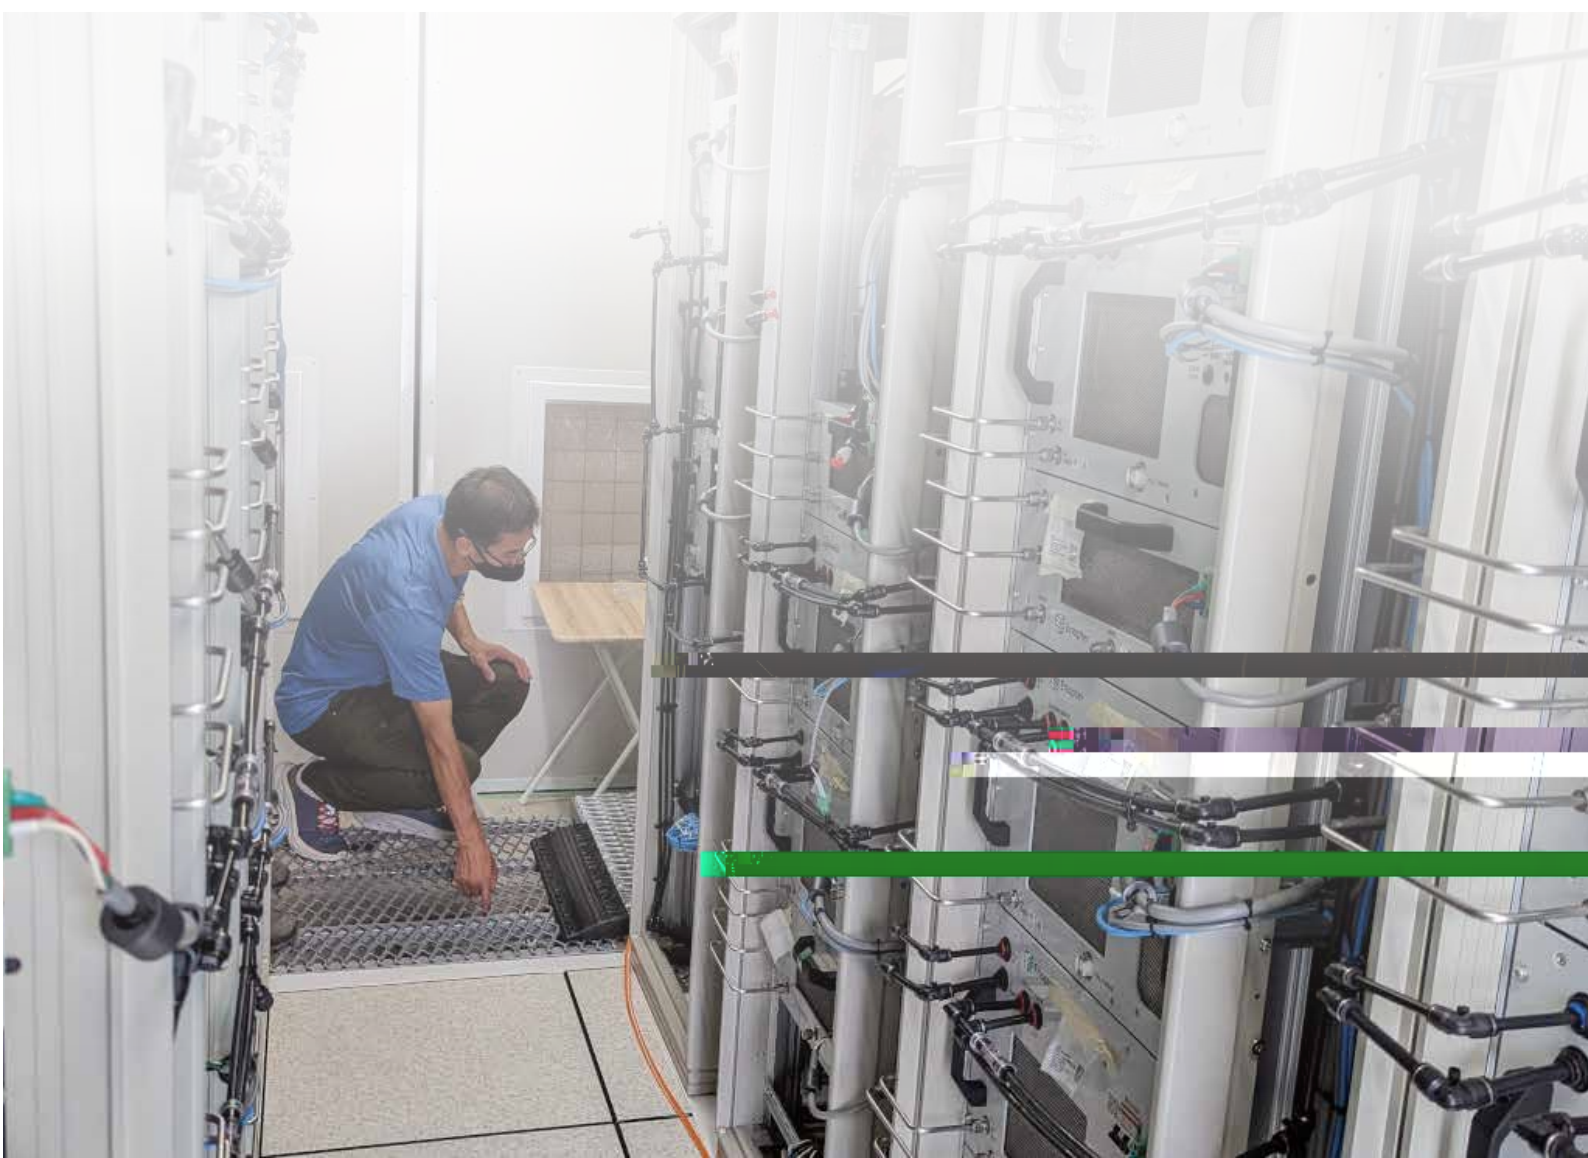

交通

意大利

× AEM EL .

kg/ h

以技术创新引领产业进步
以合作共赢共创绿色生态



储能

荷兰

× AEM EL .

kg/ h

以技术创新引领产业进步
以合作共赢共创绿色生态



储能

意大利

× AEM EL .

kg/ h

以技术创新引领产业进步
以合作共赢共创绿色生态



储能

日本

× AEM EL .

kg/ h

以技术创新引领产业进步
以合作共赢共创绿色生态



研究

荷兰

× AEM EL .

kg/ h

以技术创新引领产业进步
以合作共赢共创绿色生态



研发

巴西

Florianópolis

× AEM EL .

kg/ h

以技术创新引领产业进步
以合作共赢共创绿色生态



研究

捷克

× EM EL .

kg/ h

以技术创新引领产业进步
以合作共赢共创绿色生态



研究

智利

× AEM EL .

kg/ h

以技术创新引领产业进步
以合作共赢共创绿色生态



研究

德国

× AEM EL .

kg/ h

以技术创新引领产业进步
以合作共赢共创绿色生态



研究

德国

MW AEM Nexus

BOP

以技术创新引领产业进步
以合作共赢共创绿色生态



热电联供应用


日本大阪


H

AEM EL .
()
AEM EL .
()

/

以技术创新引领产业进步
以合作共赢共创绿色生态

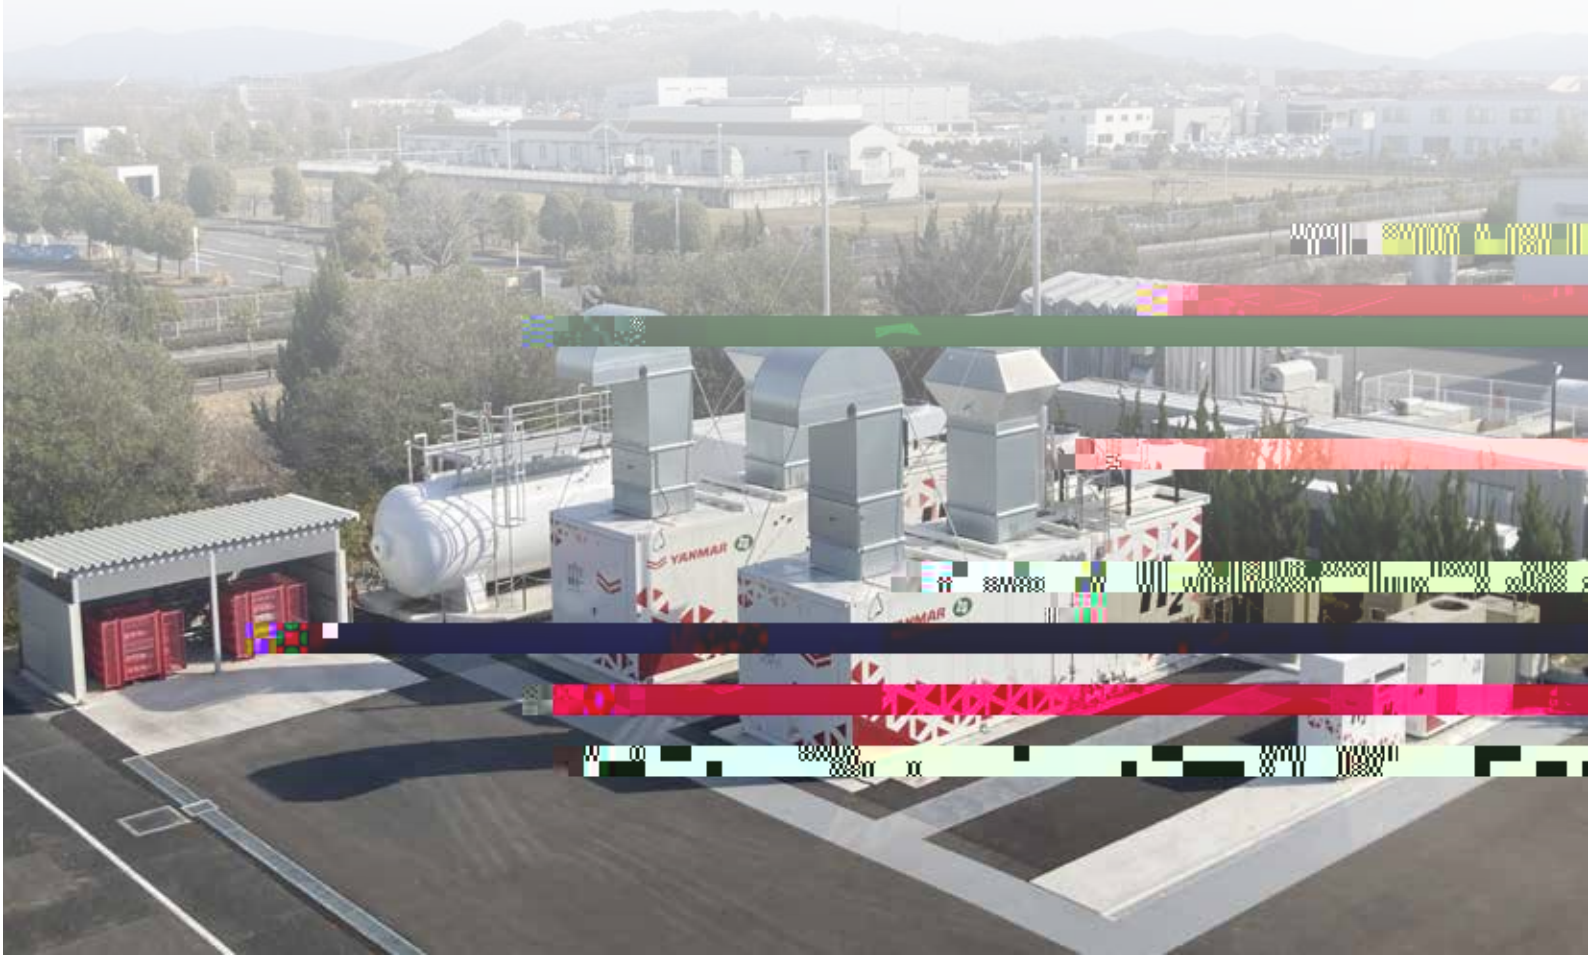



：()

：
:hydrogen@wolong.com
:www.wolong.com.cn/product